


Multi-Jaw Demolition Tool (GRX)

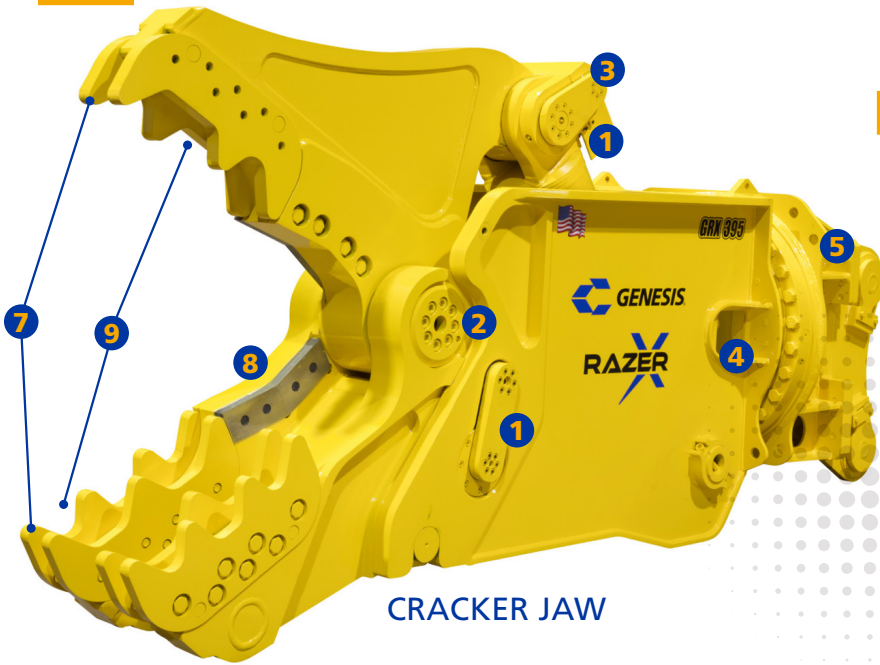

CRACKER JAW

Features

1. Hydraulic pin engagement and removal for jaw change-outs in less than 2 minutes without leaving the cab
2. Heavy-duty pivot design is integral to the jaw set, providing a power curve to match the jaw's primary application
3. Reverse-mounted cylinder protects the rod from debris
4. Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
5. Short, flat-top head with bolt-on bracket shortens the center of gravity, making it easy to change mounting for different carriers
6. Jaw stands are specific to each jaw set, providing correct positioning for efficient change-outs

Cracker Jaw

7. Low-cost, reversible, long-life crushing teeth are quickly and easily replaced, eliminating build-up
8. 4-way indexable cutting blades feature an apex that draws material deeper into the jaw for more efficient cutting
9. Easy-to-change crushing teeth are available in several configurations to maximize performance in any application



SHEAR JAW STAND

Applications

- Concrete recycling
- C & d processing
- Bridge demolition
- Wire
- Copper
- Structural steel
- Demolition
- Rebar
- Aluminum

COMPATIBLE WITH



Model	Jaw	Weight* kg (lb)	Jaw Opening mm (in)	Jaw Depth mm (in)	Reach** mm (ft. in)	Minimum Excavator Weight Stick Mount mt (lb)
GRX 195	Cracker	2,495 (5,500)	762 (30)	762 (30)	2,667 (8' 9")	20 (45,000)
	Shear	2,359 (5,200)	457 (18)	457 (18)		
	Pulverizer	2,495 (5,500)	737 (29)	660 (26)		
GRX 295	Cracker	3,221 (7,100)	965 (38)	813 (32)	2,845 (9' 4")	30 (66,000)
	Shear	3,130 (6,900)	508 (20)	508 (20)		
	Pulverizer	3,311 (7,300)	965 (38)	762 (30)		
GRX 395	Cracker	4,876 (10,750)	1,143 (45)	1,067 (42)	3,200 (10' 6")	41 (90,000)
	Shear	4,763 (10,500)	610 (24)	648 (25.5)		
	Pulverizer	4,990 (11,000)	1,143 (45)	914 (36)		

*Weight includes mounting bracket to attach to excavator. **Distance is measured from the attachment mounting pivot (boom or stick) forward. All Genesis GRX Razer X tools are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance. Patents: genesisattachments.com/products/patents

Multi-Jaw Demolition Tool (GRX)




SHEAR JAW

COMPATIBLE WITH



Features

1. Bolt-on piercing tip encapsulates front of upper jaw, minimizing risk of damage and reducing maintenance
2. Dual guide blade length matches piercing tip length so blades can be shimmed independently to accommodate piercing tip wear
3. Weld-on, replaceable, highly abrasion-resistant steel rhino horn protects front of upper jaw, reducing maintenance

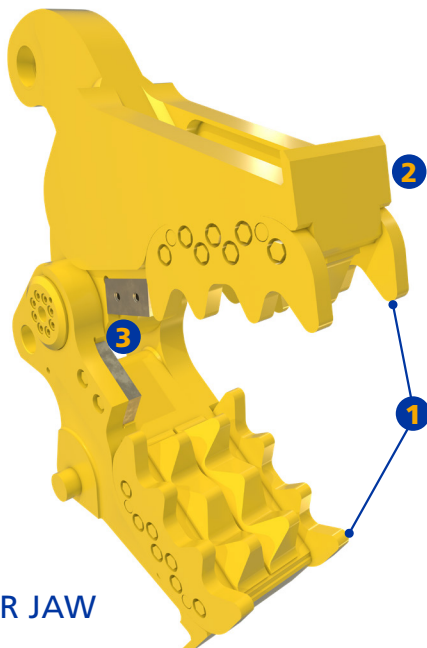

PULVERIZER JAW

Features

1. Low-cost, reversible, long-life crushing teeth are quickly and easily replaced, eliminating build-up
2. Extended wear plates aid in positioning concrete for processing
3. Indexable blades provide two usable edges